


Load stabiliser

LH-C

The **load stabiliser LH-C** allows the lift truck driver safer transport of unstable loads. The load stabiliser is fitted with a pressure relief valve and pressure gauge as standard. The all-directional articulating bolt-on contact plate is equipped with bolt-on rubber.

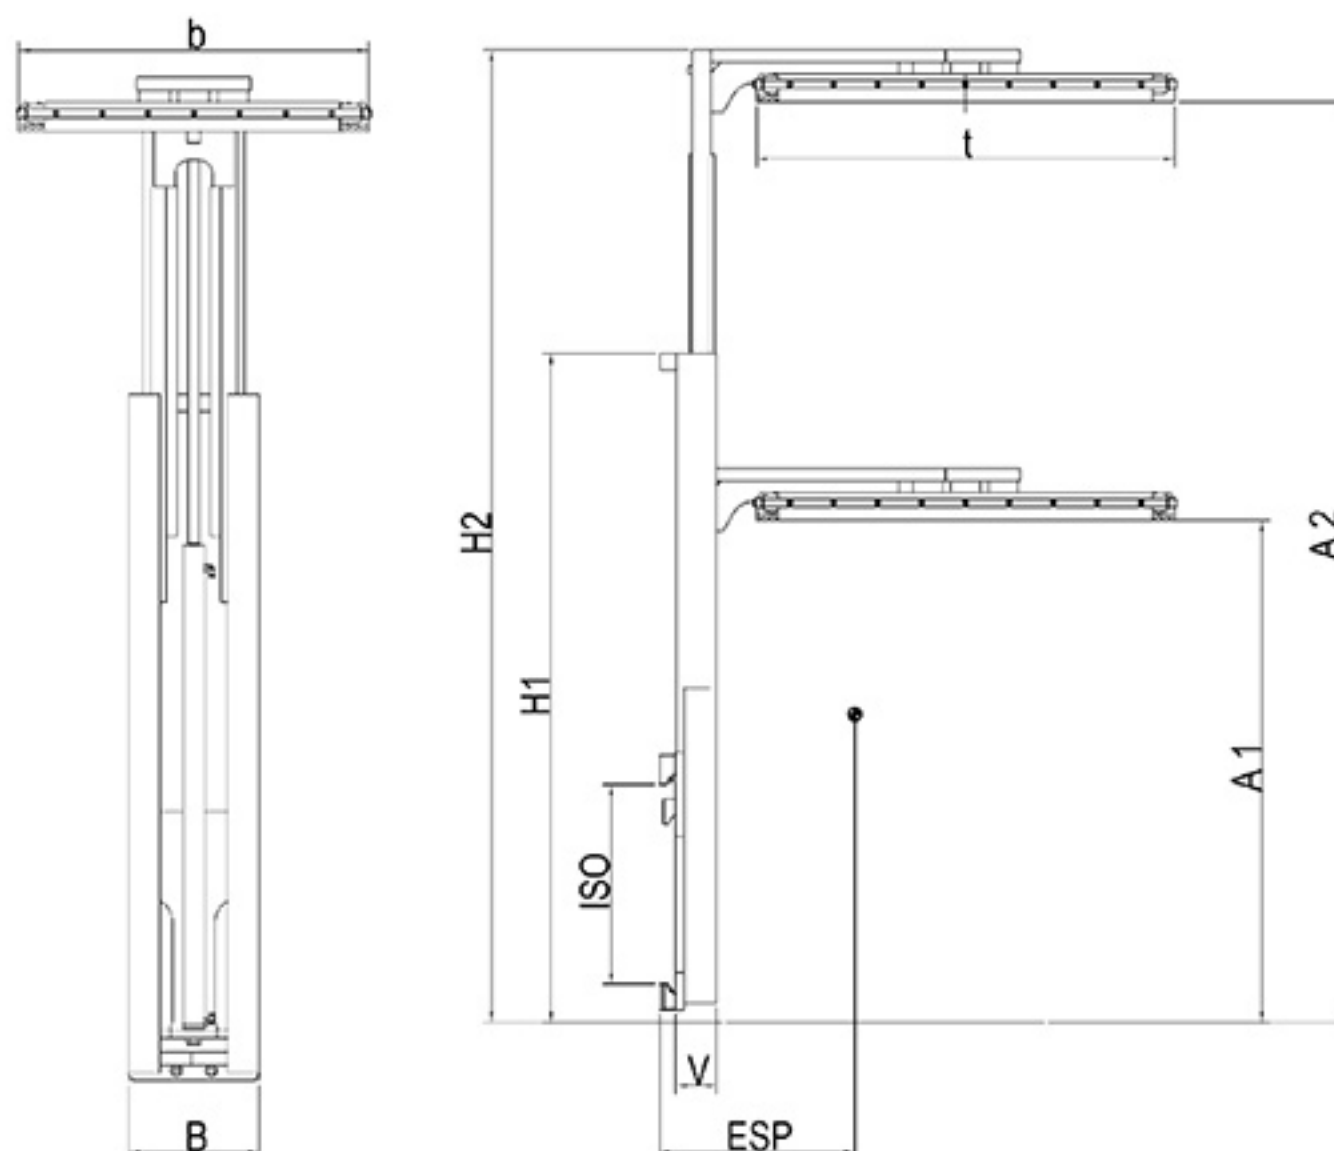

type	lift truck to LC mm	ISO	width B mm	opening range A1/A2 mm	H 1 mm	H 2 mm	pressure frame b x t mm	max. pressure force 120 bar	V LLC mm	ESP COG mm	weight kg
LH 12-C	1,0-5,0/600	II/III	300	890-1580	1150	1700	750x1000	400 kg	100	240	225
LH 13-C			300	1000-1800	1300	1925				230	240
LH 14-C			300	900-1800	1400	2025				225	245
LH 15-C			300	1100-2000	1500	2125				220	250
LH 16-C			300	1200-2200	1600	2325				210	265
LH 17-C			300	1300-2400	1700	2525				200	270
LH 18-C			300	1400-2600	1800	2725				190	295

- 1 hydraulic function required
- includes pressure relief valve and pressure gauge
- data refer to ISO type A mounting
- other opening ranges upon request
- mounting ISO IV upon request
- load backrest upon request, data change, please ask
- telescopic version upon request



DURWEN 
Forklift Attachments

More than 70 years experience